



FLOW




MARINE SYSTEMS

DX - AIR HANDLER



Flow Marine Systems is the pioneer of direct expansion air handlers manufactured with a 316L stainless steel chassis and Copper Fins. FMDXAH Units are fully insulated with High velocity Blowers, and 2" deep stainless steel drain pans. Capacities range from 4K to 16K BTU/h.

**2 YEARS WARRANTY
PARTS AND LABOR**

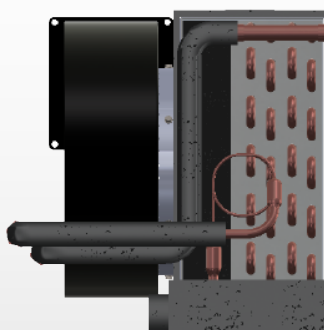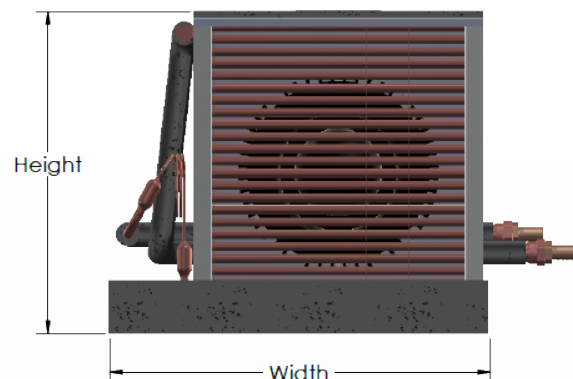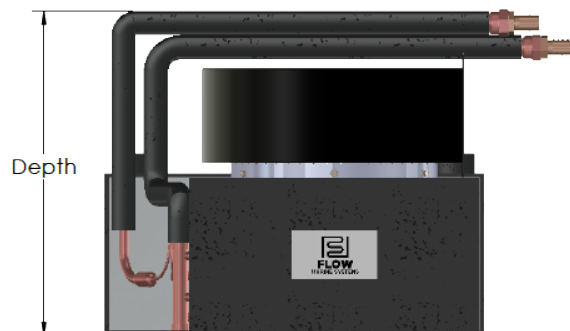

DX-AIR HANDLER SPECIFICATION TABLE

DX - Air Handler Model:	FMAHX4	FMAHX6	FMAHX8	FMAHX10	FMAHX12	FMAHX16
Height (in/mm)	10 ¾" 273mm	10 ¾" 273mm	11 ½" 292mm	12 ⅝" 321mm	12 ⅝" 321mm	13 ⅝" 346mm
Width (in/mm)	12 ⅝" 314mm	12 ⅝" 314mm	12 ⅝" 314mm	14 ⅝" 365mm	14 ⅝" 365mm	14 ⅝" 365mm
Depth (in/mm)	9 ½" 241mm	9 ½" 241mm	9 ½" 241mm	10 ½" 265mm	10 ½" 265mm	11 ⅝" 295mm
Net Weight (Lbs/Kg)	10.5 4.8	11 5	13.9 6.4	17.5 8	17.5 8	21 9.6
Gross Weight (Lbs/Kg)	18 8.2	19 8.7	22 10	25 11.4	25.5 11.6	28.25 12.9

DX-AIR HANDLER MEASUREMENT TABLE

DX - Air Handler Model:	FMAHX4	FMAHX6	FMAHX8	FMAHX10	FMAHX12	FMAHX16
Nom. Capacity (BTU/h)	4,000	6,000	8,000	10,000	12,000	16,000
Voltage (Volts)	115 - 230	115 - 230	115 - 230	115 - 230	115 - 230	115 - 230
Cycle (Hz)	50/60	50/60	50/60	50/60	50/60	50/60
Full Load Amps (FLA) Cool (A)	0.82 - 0.41	0.82 - 0.41	1.56 - 0.83	1.14 - 0.61	1.14 - 0.61	1.61 - 0.78
Max. Circuit Breaker (A)	5	5	5	5	5	5
Min. Circuit Ampacity (A)	2 - 1	2 - 1	2 - 1	2 - 1	2 - 1	3 - 1

